

STOP!

If you have any issues with the product, please contact our technical support team before returning it.

TECHNICAL SUPPORT

Technical Support : 1 (800) 881 9305

1 (714) 666 1716 X2

Email : support@ezq.com

Service Hours : Mon. - Fri. 08:00 AM - 05:00 PM P.S.T

EZQuest®
Premium Digital Life Accessories

Quick Instruction Manual for
USB-C Slim Gen 2 Hub Adapter 6-in-1
Part# H30006

Package Contents:


- 1 x H30006
- 1 x Manual
- 1 x USB-C 19.6 inches (50 cm) nylon braided cable



How to Connect to Computer:

Connect the USB-C connector to your computer or smart device USB-C port and the USB-C devices that you need to your hub.

You can also connect the power (PD) cable to the PD port of the hub so you can charge your computer or smart device while using your USB-C devices.

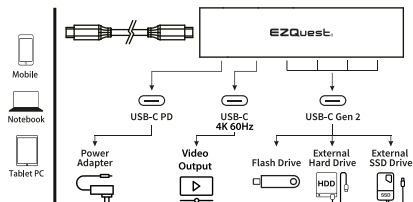

4X 10Gbs USB-C Gen 2 Ports:

Connect any devices such as USB-C SSD, external hard drive as well as USB-C flash drives to any of the USB-C ports. You can also charge or sync any of your iOS devices thru the USB-C ports as well as any other Android smart devices.

The USB-C Hub Adapter 6-Ports with USB-C PD 3.0 will allow you to take full advantage of any laptop and computer that is equipped with a USB-C, Thunderbolt 3, 4, 5 ports as well as any USB-C smart phone and tablet with OTG support.

1X USB-C 4K 60Hz Port:

Connect any USB-C desktop or portable display to your computer or smart device with USB-C port that has video feature, Thunderbolt 3, 4, or 5.

How to connect to USB-C smart phone or tablet:

Note: Please make sure that your device has the same type of USB-C connectors. The best way is to compare your charging cable connector that comes with your device to make sure it is a USB-C connector.

Please follow steps below:

- A. Hook up your devices USB-C power cable to H30006
- B. Connect any of your USB devices to the H30006
- C. Connect the USB-C connector to your smart phone or tablet
- D. Power down your device then restart it



Power:

To support full-speed charging for iPad Pro or other mobile devices, please make sure your power adapter is at least 15V (45W). Power adapter less than 45W will not supply enough power to provide pass through charging.

Desktop Use:

The PD port on this hub has two functions. It provides pass through power to a computer, and it also provides power to the hub itself, which is about 15 watts. This power is necessary for the hub to run smoothly when connected to a computer. Since a desktop computer is powered by a 110/220V outlet, you will need to connect a 45 Watt power adapter to the PD port in order to supply enough power for the hub to function smoothly.

Laptop Use:

It is recommended to use the PD port to charge your laptop while using this hub so it can get the 20 watts of power needed to run smoothly.

Specification:

- Part Number: H30006
- UPC Code: 694307300064
- Input: USB-C / USB Type-C
- One USB-C 4K 60Hz Video Output
- Four USB-C Gen 2 10Gbps Data (The total shared data is 10Gbps, when using all ports simultaneously)
- Each USB-C port is 5V/1.5A (7.5W) power output. (The total shared power is 15W, when using all ports simultaneously)
- One USB-C 100W Power Delivery port version 3.0 with pass-thru charging up to 80W output and FRS technology
- Thunderbolt 3/4 Compatible
- Cable Length: 9-inches/220 mm
- Cable Color and Material: Black Nylon Braided
- Dimension:
 - 222 x 40 x 13mm - 4.82 x 1.58 x 0.51 inches
- Weight: 3 Ounces
- One (1) year limited warranty

Please email us with any questions or feedback you might have about our products to support@ezq.com.

1 (800) 881 9305